

3.2 Inspection Opening 410x510




Standard design

- ⊙ Wetted Material: 1.4571
- ⊙ Attachment parts: 1.4301
- ⊙ Stainless steel toggle with brass insert (M22)
- ⊙ Silicone-gasket
- ⊙ Two handles
- ⊙ Neck length: see chart, neck thickness: K=12 mm
- ⊙ Surface unpolished, glass-bead blasted
- ⊙ EU-type examination: see chart
- ⊙ Design Code: AD 2000-Merkblatt (with EU-type examination)

Options

- ⊙ Wetted Materials: 1.4404, 1.4435, 1.4539, 1.4529, 1.4462, 1.4429, HC-22, HC-276, HC-2000, etc.
- ⊙ Various gasket qualities
- ⊙ Various surface qualities (glass-bead blasted, pickled or polished up to $Ra < 0,4 \mu m$)
- ⊙ Neck length up to 250 mm, neck thickness up to 20 mm
- ⊙ Swivel feature
- ⊙ Various limit- / proximity-switches
- ⊙ Attachment parts in other materials

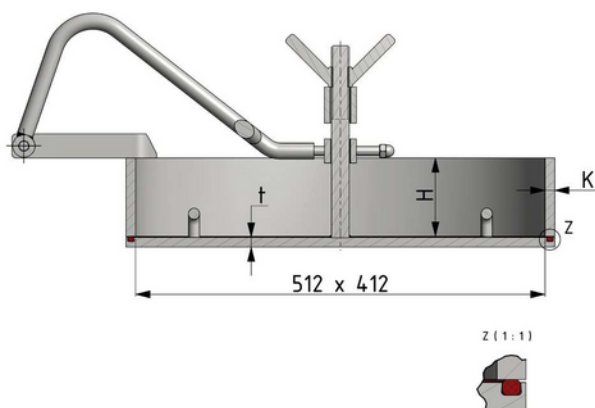

3.2 Inspection Opening

410x510

With EU-type examination

Article No.	MAWP [bar] at 150°C	Neck length (H) [mm]	Description	Weight [kg]
1022069	2	60	Inspection opening (t=12 mm thick), with welding neck, without swivel feature	27.5
1022109	2	100	Inspection opening (t=12 mm thick), with welding neck, without swivel feature	33.3
1024069	4	60	Inspection opening (t=15 mm thick), with welding neck, without swivel feature	30.9
1024109	4	100	Inspection opening (t=15 mm thick), with welding neck, without swivel feature	36.7
1026069	6	60	Inspection opening (t=20 mm thick), with welding neck, without swivel feature	36.6
1026109	6	100	Inspection opening (t=20 mm thick), with welding neck, without swivel feature	42.4

Without EU-type examination

Article No.	Neck length (H) [mm]	Description	Weight [kg]
1020069	60	Inspection opening (t=10 mm thick), with welding neck, without swivel feature	25.1
1020109	100	Inspection opening (t=10 mm thick), with welding neck, without swivel feature	31

Swivel feature

Article No.	Description	Weight [kg]
108	Swivel feature right side	1.8
109	Swivel feature left side	1.8