


Bague-hublot avec essuie-glace

Fiche technique série 73.SW Stand: 03.2001

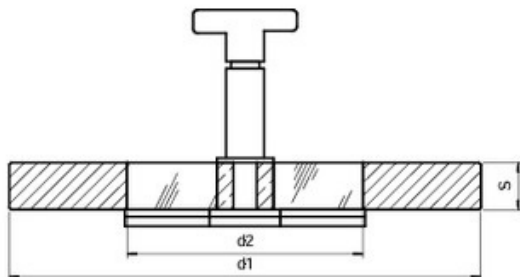

For

- Sight glass according to DIN 28120 and derivative Sight
- glass according to DIN 28121

Advantages:

- Absolute safety
- Combination with lighting
- Easy assembly
- Long service life

Ring material	Service temperature
1.0570 (steel)	-10°C to +150°C
1.4462 (stainless steel)	-30°C to +150°C
2.4602 (hastelloy)	-60°C to +150°C
2.4610	-60°C to +150°C

Construction Standard:

According to DIN/EN/ISO9001 97/23/EG 02/98, Module H/H1
 According to AD Merkblatt W0/TRD 100 and DIN 7079
 Material in accordance with DIN/EN standards
 Borosilicate glass according to DIN 7080 - DIN 7079

Service Conditions:

PN10 to PN16,
 Service temperature: 150°C
 Ring material: 1.4462, 2.6402, 2.4605, 2.4610 a.o.
 Stainless steel insert for wiper: 1.3912 (Alloy 36)

Material Certificate:

according to EN 10204 - 3.1B

Wiper blade:

- Material: stainless steel 1.4571 (316Ti), Hastelloy C22, C276
- Wiper: silicone, PTFE
- O-ring: Viton, Chemraz, Viton/FEP

D1	D2	Max Pressure	Max Pressure
		10 BAR	16 BAR
		S	S
80	45	12	12
100	55	15	15
125	65	15	20
150	70	20	25
166	80	15 (for 6 bar)	-
175	80	20	25
200	100	25	30
250	120	30	30

