



Hublot à visser Fiche technique série 64

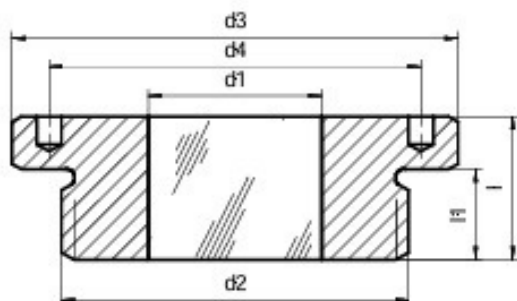

For:

- Tubing or tapped end fitting

Advantages:

- Compact part
- High pressure resistance
- Easy assembly
- Long service life

Construction Standard:

According to DIN/EN/ISO9001 97/23/EG 02/98, Module H/H1 (DIN/EN/ISO 9001)

According to AD Merkblatt W0/TRD 100 and DIN 7079

Material in accordance with DIN/EN standards

Borosilicate glass according to DIN 7080

Service Conditions: Pressure: 100 bar

Material Certificate: according to EN 10204 - 3.1B

Material:

Ring: 1.0570, 1.4462, 1.4523

Glass quality: AR-Glass (150°C), borosilicate (280°C)

d1		d2		d3	d4	l	l1
AR-Glas	Borosilicate	M	R				
10	6	M18x1,5		23	19	16.5	10
10	6		R3/8"	23	19	16.5	10
12.5	8	M20x1,5		25	21	18	11
12.5	8		R1/2"	26	21.5	18	11
16.5	10	M26x1,5		31	27	18	11
16.5	10	M27x2	R5/4"	32	27	18	11
22	12	M33x2		40	34	19	11
22	12		R1"	40	34	19	11
24	16	M42x2		50	40	23	12
24	16		R1 1/4"	50	40	23	12
26	20	M48x2		55	44	23.5	14
26	20		R1 1/2"	55	44	23.5	14
34	25	M60x2		68	54	24.5	15
34	25		R2"	68	54	24.5	15
44	25	M78x2		88	70	25.5	16
44	25		R2 1/2"	88	70	25.5	16



<https://gallet-fr.com/>