


Metaclamp aseptic illuminated sight glass ring for clamp connection — For mini floodlight, Type 51

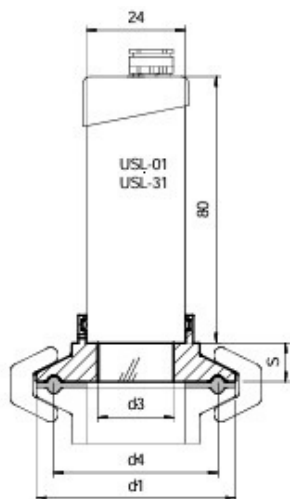

For

- Clamp connection in accordance with DIN 32676 / ISO 2852

Advantages:

Compact assembly
Optimal mounting for small reactors (chemical, pharmaceutical) in non-explosive-hazard zones
Aseptic assembly, all stainless steel

Approval:

A3 Standard for the food industry

Stainless steel ring material	Operating temperature
-1.4462	-30°C to +280°C
2.4602	-60°C to +300°C
2.4610	-60°C to +300°C

Construction standard:

In accordance with DIN/EN/ISO 9001 97/23/EC 02/98, Module H/H1 (DIN/EN/ISO 9001)

In accordance with AD Merkblatt W0/TRD 100 and DIN 7079

Material in accordance with DIN/EN

Borosilicate glass in accordance with DIN 7080

Operating conditions:

- Pressure: -1 to 16 bar
- Temperature: see table

Material certificate:

In accordance with EN 10204 - 3.1B

Lumiglas mini floodlight, all stainless steel, type 51

Voltage: AC or DC

12V halogen lamp 5W (without push button)

24V halogen lamp 20W (with push button)

Body: Stainless steel 1.4301 (304)

Maximum temperature at the cable gland: 90°C

Dust-tight and protected against water splashes, IP65 in accordance with EN 60529 / DIN VDE 0470 Part 1

Dimensions		d1	d3	d4	S	Max pressure (Bar)
DN	Inch					
18	½", ¾"	25	18	12	10	16
10/15/20	½", ¾"	34	18	27.5	7	16
25/32/40	1", 1½"	50.5	25	43.5	7	16
*50	*2"	64	30	56.5	7	16



<https://gallet-fr.com/>