


Sight glass ring with socket fitting

Technical data sheet series 74

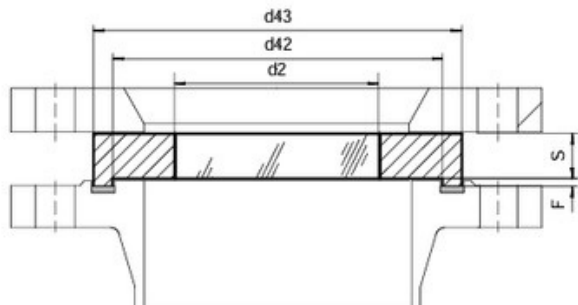

For:

Base fitting according to DIN 28115 or DIN 28025

Welding flange according to DIN 2632 to 2636

Type C socket flange

Advantages:

- Absolute safety
- Easy assembly
- Long service life

Approvals:

- TÜV
- EEx factory mark

Construction Standard:

According to DIN/EN/ISO9001 97/23/EG 02/98, Module H/H1

According to AD Merkblatt W0/TRD 100 and DIN 7079

Material in accordance with DIN/EN standards

Borosilicate glass according to DIN 7080

DIN 7079

Material Certificate: according to EN 10204 - 3.1B

Ring material	Service temperature
1.4462	-30°C to +280°C
1.0570	-10°C to +300°C
2.4602	-60°C to +300°C
2.4605	-60°C to +300°C
2.4610	-60°C to +300°C

DN	Max Pressure				Socket fitting		
	16 bar		40 bar		d42	d43	F
	d2	S	d2	S			
40	35	10	35	15	61	75	4
50	45	12	45	15	73	87	4
65	60	12	60	15	95	109	4
80	63	15	63	20	106	120	4
100	70	15	70	25	129	149	4,5
125	80	20	80	30	155	175	4,5
150	100	20	100	30	183	203	4,5
200	125	30	-	-	239	259	4,5



<https://gallet-fr.com/>