



Sight glass ring for screw-type sight glass MV (derived from DIN 11851) Technical data sheet 82

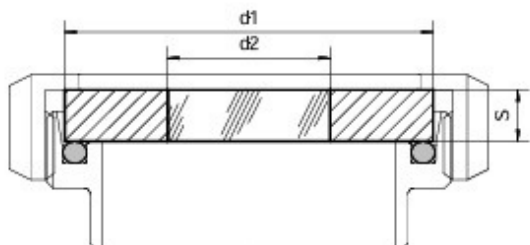

For:

- Fitting according to DIN 11851

Advantages:

- Absolute safety
- Long service life
- Easy assembly and cleaning

Construction Standard:

According to DIN/EN/ISO9001 97/23/EG 02/98, Module H/H1 (DIN/EN/ISO 9001)
According to AD Merkblatt W0/TRD 100 and DIN 7079
Material in accordance with DIN/EN standards
Borosilicate glass according to DIN 7080

Service Conditions: Temperature: see table

Material Certificate: according to EN 10204 - 3.1B

Ring material	Service temperature
1.4462	-30°C to +280°C
2.4602	-60°C to +300°C
2.4605	-60°C to +300°C
2.4610	-60°C to +300°C

DN	D1	D2	S	Max Pressure
32	?	25	10	40
40	50	25	10	40
50	63	35	10	16
65	80	45	10	10
80	93	50	10	10
100	113	60	15	16
125	142	75	20	16
150	166	80	20	16

