

Lumistar Luminaire ESL 53LED Ex

II 2G Ex db IIC T6 Gb
II 2D Ex tb IIIC T80°C Db

APPLICATION:

For safe use in hazardous areas of zones 1, 2, 21 and 22 (gas and dust).

This Lumistar version impresses with its small design and powerful light output.

For illuminating the interior of vessels, tanks, agitators, silos and other generally closed containers and reactors and also in visual flow indicators in explosive environments.

Compatible with round sightglass fittings according to DIN 28120/28121 or similar as well as for screw-type sightglass fittings analogue DIN 11851 and flow sightglass fittings.

Trend-setting LED technology guarantees even lower energy consumption, longer service life and flexible light colour.

PROTECTION:

IP65 and IP67 to DIN EN 60529

AMBIENT TEMPERATURES:

-20°C to 50°C



ESL 53LED Ex mit Klappscharnier EX

TECHNICAL DATA EX PROTECTION:

Approval according to Directive 2014/34/EU

This luminaire meets the essential safety and health requirements by complying with the regulations for:

Gas	
EN IEC 60079-0:2018	General Requirements
EN 60079-1:2014	Flame-proof Enclosures „d“
Explosion group	IIC (includes IIA and IIB)
Temperature class	T6 at 40°C / T4 at 50°C


Dust	
EN IEC 60079-0:2018	General Requirements
EN 60079-31:2014	Flame-proof Enclosures „t“
Explosion group	IIIC (includes IIIA and IIIB)
Temperature class	T85°C at 40°C / T130°C at 50°C

Voltage	Nominal power	Luminous flux	Light colour*	Beam angle	Addition	Part no.
24 V AC/DC	7W	400-500 lm	5700 K cold white	19°	hinged bracket	3542.151.00
24 V AC/DC	7W	400-500 lm	5700 K cold white	19°	flanged adapter	3542.153.00
24 V AC/DC	7W	400-500 lm	5700 K cold white	30°	hinged bracket	3542.155.00
24 V AC/DC	7W	400-500 lm	5700 K cold white	30°	flanged adapter	3542.157.00


*other light colours on request

<https://gallet-fr.com/>

ESL 53LED Ex
with hinged bracket

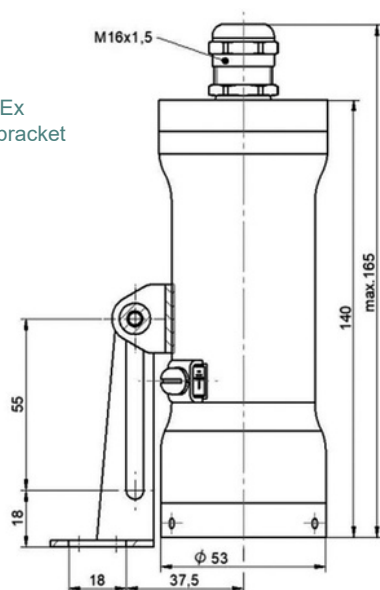

ESL 53LED Ex
for flanged adapter

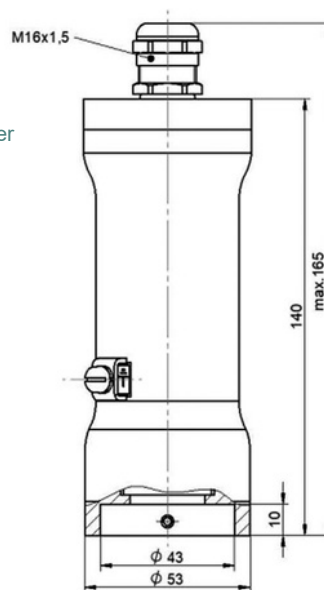

FASTENING:

In the assembly of a circular sight glass fitting and visual flow indicators, the luminaire is fixed to the coverflange with the hinged bracket. With a screw-type sightglass fitting the luminaire is fixed to the cover nut, or optionally via a flanged adapter or a hinged bracket.

ELECTRICAL CONNECTION:

Cable gland at the top of the luminaire cover
cable length: min. 3 m

NOMINAL SIZES:

For circular sight glasses according to DIN 28120, DIN 28121 and visual flow indicators, mounting on the cover flange: from DN 50.

For screw-type sight glass fittings similar to DIN 11851, fixing on or under the cover nut:
DN 50, 65, 80: via flanged adapter
DN 80, 100, 125: via hinged bracket
DN 80 via flanged adapter or hinged bracket

WEIGHT:

1.7 kg including hinged bracket and cable

Materials

Luminaire body	Stainless steel
Glass	Borosilicate
Fastening parts	Stainless steel

Accessories

Part no.

Luminaire mounting without field of view

Flanged adapter DN 50, (slotted nut opening: 62 mm)	1356.045.00
Flanged adapter DN 60, (slotted nut opening: 65 mm)	1356.036.00
Flanged adapter DN 80, (slotted nut opening: 80 mm)	1356.077.00

Luminaire mounting with field of view for MV

for nom. diameter DN 80 (slotted nut opening: 94 mm)	0354.035.00
for nom. diameter DN 100 (slotted nut opening: 115 mm)	0354.036.00
for nom. diameter DN 125 (slotted nut opening: 138 mm)	0354.037.00

Order data (example):

Lumistar luminaire ESL 53LED Ex, part no. 3542.151.00