


Metaclamp sight glass ring for NA-Connect™ mounting — Technical data sheet, 80.NA series

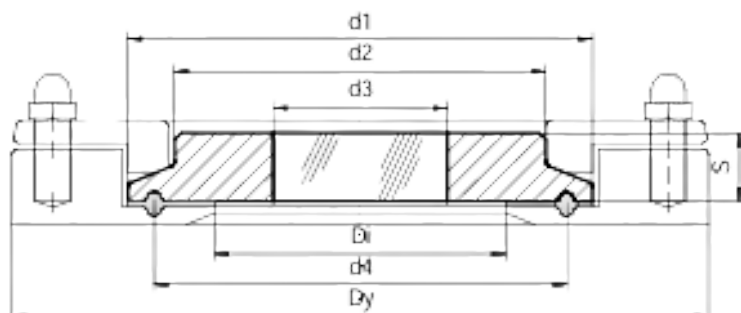

For:

NA-Connect™

DIN 32676 / ISO 2852 connection

Advantages:

Aseptic mounting

Absolute safety

Compact assembly, easy cleaning

High longevity

Approval:

A3 Standard for the food industry

Construction standard:

In accordance with DIN/EN/ISO 9001 97/23/EC 02/98, Module H/H1 (DIN/EN/ISO 9001)

In accordance with AD Merkblatt W0/TRD 100 and DIN 7079

Material in accordance with DIN/EN

Borosilicate glass in accordance with DIN 7080

Operating conditions:

Pressure and temperature: see table

Material certificate:

In accordance with EN 10204 - 3.1B

Stainless steel ring material	Operating temperature
1.4462	-30°C to +280°C
2.4602	-60°C to +300°C
2.4610	-60°C to +300°C

NA-Connect dimension		PN	d1	d2	d3	d4	S	Dy	Di
DIN	Tube OD								
	NAC-OD-¾"	16	25	18	10	20.2	7	55	15
NAC-DIN-20		16	34	24	12	27.5	7	70	20
NAC-DIN-40	(NAC-OD-1½")	16	50.5	38	25	43.5	7	85	35.5
NAC-DIN-50	(NAC-OD-2")	16	64	51	30	56.5	7	100	48.5
	(NAC-OD-2½")	10	77.5	63.5	35	70.5	10	112	60.2
NAC-DIN-65	(NAC-OD-3")	10	91	76	40	83.5	10	131	72
NAC-DIN-80		10	106	88.9	50	97	10	146	84.9
NAC-DIN-100	(NAC-OD-4")	10	119	101.6	55	110	12	170	97.6



<https://gallet-fr.com/>