


2.5 Pressureless Glass-Cover

Standard design

- ⊗ Wetted materials: 1.4571
- ⊗ Attachment parts: 1.4301
- ⊗ Soda-lime glass-pane DIN8902
- ⊗ Plastic handles with stainless steel insert
- ⊗ Silicone-gasket
- ⊗ Hinge and plastic knob
- ⊗ Neck length 150 mm
- ⊗ Surface unpolished, glass-bead blasted;
from NW600 unpolished, pickled

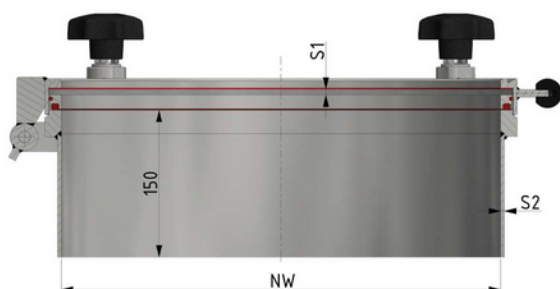

Options

- ⊗ Wetted materials: 1.4404, 1.4435, 1.4539, 1.4529, 1.4462, 1.4429, HC-22, HC-276, HC-2000, etc.
- ⊗ Borosilicate glass-pane DIN7080
- ⊗ Intermediate sizes
- ⊗ Various gasket qualities
- ⊗ Various surface qualities (glass-bead blasted, pickled or polished up to $Ra < 0,2 \mu m$)
- ⊗ Neck length up to 2000 mm, neck thickness up to 20 mm
- ⊗ Conical design of the neck (up to max. 8 mm neck thickness)
- ⊗ Neck shaped to match tank-diameter
- ⊗ Side swiveling
- ⊗ Various handles (stainless steel handles, toggles, nuts, etc.)
- ⊗ Wedge for side installation
- ⊗ Locking pin in open position
- ⊗ Springassists (torsion- or toolspring)
- ⊗ Installation of nozzles (TC-ferrules (DIN32676), HZ-Connect, etc.) in the shell section
- ⊗ Various limit- / proximity-switches
- ⊗ Safety-grill / safety-cross
- ⊗ Attachment parts in other materials
- ⊗ Wiper and / or luminaires
- ⊗ Logo (glass bead blasted on the glass-pane) according to customer template (need to be checked for specific application)

2.5 Pressureless Glass-Cover

Article No.	NW	Number of screws [M16]	Thickness of glass-pane (S1) [mm]	Neck thickness (S2) [mm]	Weight [kg]
332 004	200	4	6	4	13
332 504	250	4	6	4	15
333 004	300	4	6	4	17
333 504	350	4	6	4	19
334 004	400	4	6	4	21
334 504	450	4	6	4	23
335 004	500	4	6	4	27
336 004	600	4	6	4	31