
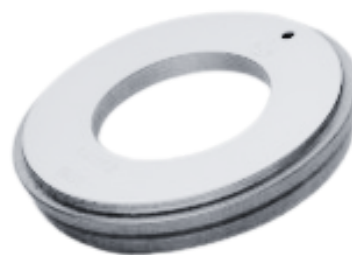


Bague-hublot pour raccord DIN 11851 Fiche technique série 81

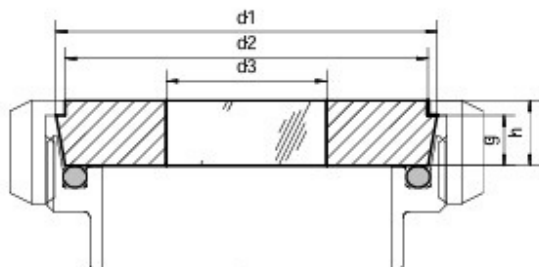

For:

Fitting according to DIN 11851

Advantages:

- Absolute safety
- Long service life
- Easy cleaning, no retention zone
- Minimal footprint

Construction Standard:

According to DIN/EN/ISO9001 97/23/EG 02/98, Module H/H1 (DIN/EN/ISO 9001)

According to AD Merkblatt W0/TRD 100 and DIN 7079

Material in accordance with DIN/EN standards

Borosilicate glass according to DIN 7080

Service Conditions:

Temperature: see table

Material Certificate:

according to EN 10204 - 3.1B

Ring material	Service temperature
1.4462	-30°C to +280°C
2.4602	-60°C to +300°C
2.4605	-60°C to +300°C
2.4610	-60°C to +300°C

DN	D1	D2	D3	h	g	Max Pressure
32	50	41	23	13	10	40
40	56	48	25	13	10	40
50	68.5	61	35	14	11	25
65	86	79	45	16	12	25
80	100	93	50	16	12	16
90	111	103	55	20	15	16
100	121	114	60	20	15	16
125	150	137	70	23	17	16
150	176	163	80	24	18	16



<https://gallet-fr.com/>