


Sight glass ring for SMS connection — Technical data sheet, 81.SMS series

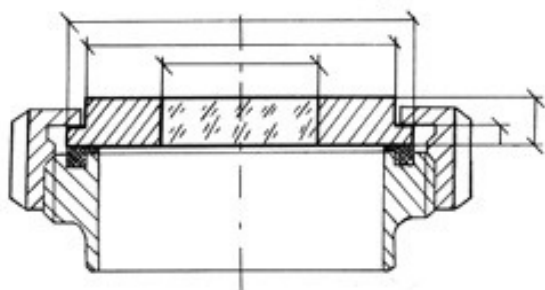

For

SMS connection

Advantages:

Absolute safety
High longevity
Minimum footprint

Construction standard:

In accordance with DIN/EN/ISO 9001 97/23/EC 02/98, Module H/H1 (DIN/EN/ISO 9001)

In accordance with AD Merkblatt W0/TRD 100 and DIN 7079

Material in accordance with DIN/EN
Borosilicate glass in accordance with DIN 7080

Operating conditions:

Temperature: see table

Material certificate:

In accordance with EN 10204 - 3.1B

Ring material	Operating temperature
1.4462	-30°C to +280°C
2.4602	-60°C to +300°C
2.4605	-60°C to +300°C
2.4610	-60°C to +300°C

DN	D1	D2	d3	h	g	Max pressure
25	35.5	20	32	10	5	6
38	55	25	47.9	10	5	6
51	65	35	60.4	10	5	6
76	92	50	85	10	5	6
104	118	60	112	10	5	6



<https://gallet-fr.com/>