


Bride - hublot – suivant ANSI B16.5 série 13

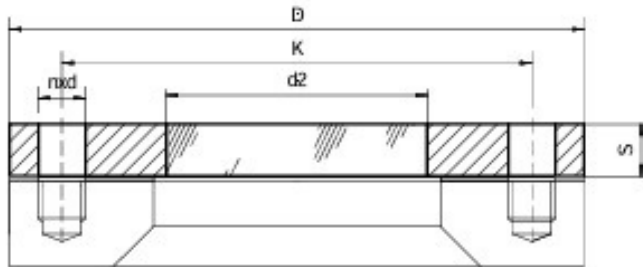

For:

- Flat-faced flange with plane gasket seating, according to ANSI

Advantages:

- Absolute safety
- Easy assembly
- Maximum viewing diameter
- Minimal footprint

Construction Standard:

- According to DIN/EN/ISO9001, 97/23/EG 02/98, Module H/H1
- According to AD Merkblatt W0/TRD 100 and DIN 7079
- Material in accordance with DIN/EN standards
- Borosilicate glass according to DIN 7080

Service Conditions:

- Pressure: PN20 to PN50, other pressures on request

Material Certificate:

according to EN 10204-3.1B

Ring material	Service temperature
1.4462	-30°C to +150°C
1.0570	-10°C to +150°C
2.4602	-60°C to +150°C
2.4610	-60°C to +150°C
2.4605	-60°C to +150°C

PN20 – 150lb/sq.in.

Flange				Glass	Screws		Gasket
DN	D	K	S	d2	n	d	
1½"	127,0	98,6	16	40	4	15,7	127,0x41x2
2"	152,4	120,7	20	50	4	19,1	152,4x53x2
2½"	177,8	139,7	20	60	4	19,1	177,8x63x2
3"	190,5	152,4	20	75	4	19,1	190,5x90x2
4"	228,6	190,5	20	100	8	19,1	228,6x103x2
6"	279,4	241,3	25	140	8	22,4	279,4x154x2
8"	342,9	298,5	25	160	8	22,4	342,9x203x2

PN50 – 300lb/sq.in.

Flange				Glass	Screws		Gasket
DN	D	K	S	d2	n	d	
1½"	155,4	114,3	30	40	4	22,3	155,4x41x2
2"	165,1	127,0	28	50	8	19,0	165,1x53x2
2½"	190,5	149,3	30	60	8	22,3	190,5x63x2
3"	209,5	168,1	32	70	8	22,3	209,5x78x2
4"	254,0	200,1	36	100	8	25,4	254,0x103x2



<https://gallet-fr.com/>